

VA NH00 280 FM (900 264)

- Surge arrester for use in NH00 and NH1 fuse holders
- Zinc oxide varistor with monitoring device, disconnector and integrated backup fuse (VA NH with additional spark gap connected in series)
- Fault indication by tripping indicator





Basic circuit diagram

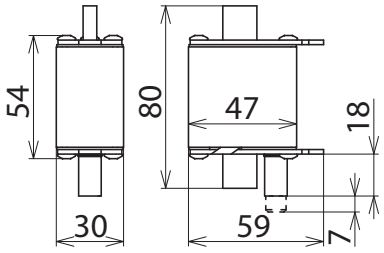

Dimension drawing

Surge arrester with a varistor and a spark gap connected in series; for use in NH00 fuse holders for TT and TN systems, optionally available with special indicator for remote signalling.

Type	**VA NH00 280 FM**
Part No.	**900 264**
SPD according to EN 61643-11 / IEC 61643-11	Type 2 / class II
Energy coordination with terminal equipment (≤ 10 m)	Type 2 + type 3
Nominal voltage (a.c.) (U_N)	230 V (50 / 60 Hz)
Max. continuous operating voltage (AC) (U_C)	280 V (50 / 60 Hz)
Nominal discharge current (8/20 µs) (I_n)	10 kA
Max. discharge current (8/20 µs) (I_{max})	20 kA
Voltage protection level (U_p)	≤ 1.5 kV
Response time (t_A)	≤ 100 ns
Max. mains-side overcurrent protection	not required
Rated breaking capacity of the internal backup protection	25 kA
Short-circuit withstand capability (I_{SCCR})	25 kA_{rms}
Temporary overvoltage (U_T) – characteristic	440 V / 120 min. – withstand
Indication of disconnector	red indicator
Indicator for remote signalling	tripping distance of 7 mm
Number of ports	1
Operating temperature range (T_U)	-40 °C … +80 °C
For mounting on	NH fuse holder, size 00
Enclosure material	Thermoplastic, red, UL 94 V-0
Place of installation	Indoor
Degree of protection	IPX4W

Masterdata	
Net weight	156.9 g/pc(s)
GTIN	4013364073661
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363030

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.