FILTER FAN PLUS - SIZE 2 (124 X 124 MM)

FPI 018 | 01871.1-30



Filter fan FPI size 2 (124 x 124 mm) for air conditioning enclosures and casings. Configuration: FPI - airflow direction "in" (standard version: blowing). Optimum air conditioning for your enclosure: The Filter Fan Plus blows cooler outside air into the enclosure. The warmer air inside the enclosure is discharged via the exit filter. The resulting air flow cools the enclosure and protects the components from overheating.

- Only one filter mat required (on the filter fan)
- Easy installation thanks to mounting frame with twist locks
- Effective air circulation
- Accessories: Hose-proof hood to increase the protection type to IP56

OVERVIEW TECHNICAL DATA

Device type	Filter fan Plus (DC)
Protection class	II
Protection type	IP54
Material hood	Plastic to UL94 V-0, light grey
Filter material	Plastic fibre with progressive structure
Filter mat	G3
Casing	Plastic to UL94 V-0, light grey
AC/DC	DC
Operating voltage	48 V
Power consumption	4,2 W
Axial fan	Aluminium fan body, rotor metal
Cooling airflow rate outlet filter	56 m³/h
Cooling airflow rate blowing	67 m³/h
Average emission sound pressure level	58 dB(A)
Service life	>65000 h
Operating temperature	-20 °C - 70 °C
Operating humidity	≤90 % RH
Storage humidity	≤90 % RH
Storage temperature	-40 °C - 70 °C
Connection	2 stranded wires, 300 mm
Mounting frame	With 4 built-in rotary latches for locking
Height	152 mm
Width	152 mm
Depth	91 mm
Installation depth	66 mm

Weight	500 g
Mounting cut-out	124 x 124 mm
Item number accessories 1	08634.0-00
Item number accessories 2	11871.0-00
Item number accessories 3	08671.0-00
Accessory 1	Replacement filter mat FM 086
Accessory 2	FPI 118 exit filter with air-flap outlet technology
Accessory 3	Water jet protection bonnet FFH 086
Note	Other voltages on request;Drilling pattern for screw fixing marked on mounting frame.
Protection type UL	NEMA Type 12

EXIT FILTER - SIZE 2 (124 X 124 MM)

Article number	Filter mat	Height	Width	Depth	Installation depth	Weight
11871.0-00	ISO coarse 55 % according to ISO 16890 (G3), grav. Initial gravimetric arrestance 57 %	152 mm	152 mm	60 mm	22 mm	200 g


FILTER MAT BAG

Article number	packaging_size	Filter mat	Mounting cut-out
08634.0-00	5 Piece	ISO coarse 55 % according to ISO 16890 (G3), grav. Initial gravimetric arrestance 57 %	118x118 mm

HOSE-PROOF HOOD

Article number	material_sealing	cutout_dimension	Height	Width	Depth	Weight
08671.0-00	Silicone, food safe	FPI/FPO 018 124 x 124 mm	279 mm	225 mm	58 mm	1200 g

TECHNICAL DRAWINGS

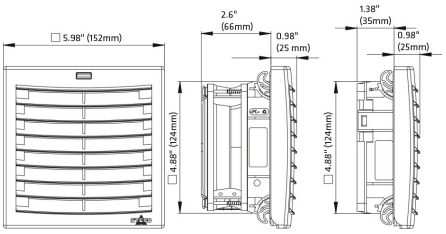





Enclosure cut-out