SENSORS FOR SENSOR HUB

SEN 073 | 07302.0-00




OVERVIEW TECHNICAL DATA


Measurement signal	visible light
Protection type	IP65
Casing	Stainless steel
Measurement range	0,01 lx - 83865 lx
Measurement range tolerance	± 0,2 %
Reaction time	t90 <7 s
Operating temperature	-40 °C - 70 °C
Operating humidity	≤100 % RH
Storage humidity	≤90 % RH
Storage temperature	-40 °C - 85 °C
Connection	Male connector M12 IEC 61076-2-101, 4-pole, A-coded
Design	SHC 071 sensor
Mounting	incl. pipe clip for screw fixing, Ø 3 mm
Setup height	≤4000 m
Height	Ø 20 mm
Width	Ø 20 mm
Depth	40 mm
Weight	25 g
Item number accessories 1	244445
Item number accessories 2	244446
Item number accessories 3	244447
Accessory 1	Cable 2.0 m, fully assembled with M12 cable socket IEC 61076-2-101, 4-pole, A-coded, shielded
Accessory 2	Cable 5.0 m, for self-assembly, incl. M12 cable socket IEC 61076-2-101, 4-pole, A-coded, shielded

Accessory 3	Cable 20.0 m, for self-assembly, incl. M12 cable socket IEC 61076-2-101, 4-pole, A-coded, shielded


TECHNICAL DRAWINGS

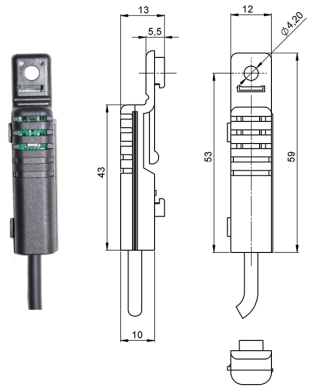

07300.1-00 | 07300.1-01



07300.0-00 | 07301.0-00 | 07303.0-00



07300.0-00 | 07301.0-00 | 07303.0-00