
DEHNiso Combi Sets

DICS WB D50.10 4.2M GFK AL V2A (105440)



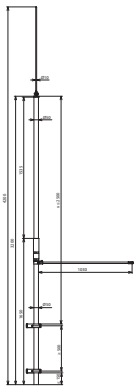

Dimension drawing

Type	DICS WB D50.10 4.2M GFK AL V2A
Part No.	**105440**
Total length	4200 mm
Number of spacers	1
Number of fixing brackets	2
Length of supporting tube	3200 mm
Max. gust wind speed	(Wall mounting max. free length 3,500 mm, Ø8 mm) 232 km/h
Material of supporting tube	**GRP / Al**
Type	one-piece
Length of air-termination rod	1000 mm
Material of air-termination tip	**StSt**
Length of spacer	1030 mm
Material of spacer	**GRP-Al-St/tZn**
Material factor km	0.7
Material of fixing bracket	**StSt**
Permanent temperature range	-50 °C ... +100 °C
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	7.64 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364099692
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component