
Spacer with EB element for HVI Conductor (length of variable sealing end 350-900 mm)

DIDH PAE 20 D16 1270 AL V2A (105461)



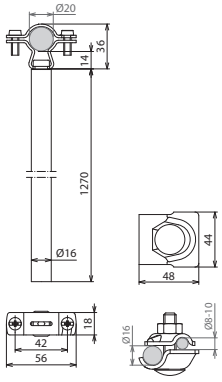

Dimension drawing

Spacer for establishing the variable sealing end of the HVI Conductor.
With MV clamp for connection to the equipotential bonding (Rd 16 mm / Rd 8-10 mm).
Concrete base (Part No. 102 010, weight 17 kg) and base plate (Part No. 102 050) must be ordered separately.

Type	**DIDH PAE 20 D16 1270 AL V2A**
Part No.	**105461**
Material of spacer	Al
Length of spacer	1270 mm
Conductor support Rd	20 mm
Material of conductor holder	StSt
Clamping range Rd MV clamp	8-10 / 16 mm
Material of clamp	Al
Length of variable sealing end	350-900 mm
Max. gust wind speed (1 base, 17 kg each; l = 900 mm)	105 km/h
Max. gust wind speed (2 bases, 17 kg each; l = 900 mm)	150 km/h
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	821 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364381520
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.