
Spacer with EB element for HVI light plus Conductor

DH PAE 18 D16 1000 AL V2A (105466)



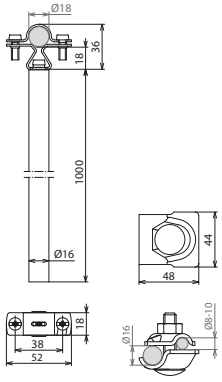

Dimension drawing

Spacer for establishing the variable adjustment range of the HVI light plus Conductor.
With MV clamp for the connection to the equipotential bonding (Rd 16 mm / Rd 8–10 mm).
The concrete base (part no. 102 010, weight 17 kg) and the plastic base plate (part no. 102 050) have to be ordered separately.

Type	**DH PAE 18 D16 1000 AL V2A**
Part No.	**105466**
Material of spacer	Al
Length of spacer	1000 mm
Conductor support Rd	18 mm
Material of conductor holder	StSt
Clamping range Rd MV clamp	8-10 / 16 mm
Material of clamp	Al
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	667.45 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364484900
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component