
Variable tripod with EB element for HVI power Conductor (length of variable sealing end 900 - 1500 mm)

V DBS RA320 PAE 27 V 600 1180 V2A (105468)



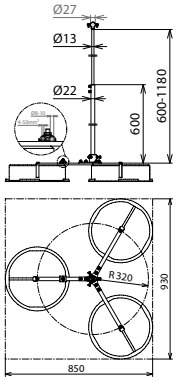

Dimension drawing

Tripod (hinged) with variable spacer (small) for establishing the variable sealing end of the HVI power Conductor.
With UNI earthing clamp for connecting 1x Rd 8-10 mm and 1x conductor 4-50 mm².
Adjustable to the roof inclination up to max. 10°.
The **three concrete bases** (Part No. 102 075, weight 8.5 kg) and **base plates** (Part No. 102 060) must be **ordered separately**.

Type	**V DBS RA320 PAE 27 V 600 1180 V2A**
Part No.	**105468**
Material of tripod	StSt
Support of tripod	22 mm
Radius	320 mm
Number of concrete bases	3 (8.5 kg each)
Space required for tripod	930 x 850 mm
Material of spacer	StSt
Conductor support Rd	27 mm
Adjustment range of spacer	600-1180 mm
Length of variable sealing end	900-1500 mm
Max. gust wind speed (3 bases 8.5 kg each; l = 900 mm)	170 km/h
Max. gust wind speed (3 bases, 8.5 kg each; l = 1500 mm)	104 km/h
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	3.65 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364381582
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.