
Variable tripod with EB element for HVI Conductor (length of variable sealing end 900-1500 mm)

V DBS RA320 PAE 20 V 600 1180 V2A (105469)



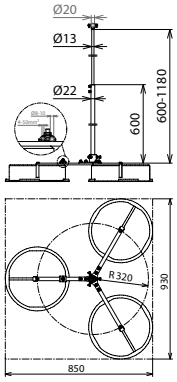

Dimension drawing

Tripod (hinged) with variable spacer for establishing the sealing end of the HVI Conductor.
With UNI earthing clamp for connecting 1x Rd 8-10 mm and 1x conductor 4-50 mm².
Adjustable to the roof inclination up to max. 10°.
The **three concrete bases** (Part No. 102 075, weight 8.5 kg) and the **base plate** (Part No. 102 060) must be **ordered separately**.

Type	**V DBS RA320 PAE 20 V 600 1180 V2A**
Part No.	**105469**
Material of tripod	StSt
Support of tripod	22 mm
Radius	320 mm
Number of concrete bases	3 (8.5 kg each)
Space required for tripod	930 x 850 mm
Material of spacer	StSt
Conductor support Rd	20 mm
Adjustment range of spacer	600-1180 mm
Length of variable sealing end	900-1500 mm
Max. gust wind speed (3 bases 8.5 kg each; l = 900 mm)	180 km/h
Max. gust wind speed (3 bases, 8.5 kg each; l = 1500 mm)	110 km/h
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	3.64 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364381575
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component