
Supporting tubes for HVI light plus Conductor

SR D40 1600 FSP1000 HVI LI PL GFK AL V2A (105673)



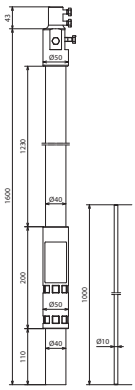

Dimension drawing

Supporting tube with internal sealing end and EB spring element. Air-termination tip Ø10 mm.

Type	**SR D40 1600 FSP1000 HVI LI PL GFK AL V2A**
Part No.	**105673**
Material of air-termination tip	StSt
Length of air-termination rod	1000 mm
Material of supporting tube	**GRP / Al**
Length of supporting tube	1600 mm
Transport length	1600 mm
Diameter Ø outside	40 mm
Length of insulating clearance	1230 mm
Wall thickness	4 mm
Material factor km	0.7
Permanent temperature range	-50°C to +100°C
Type	UV-stabilised
Sleeve	50 x 5 mm
Pull-out force with a length of 500 mm	200 N (supporting tube insulator as per 62561-8)
Bending force with a length of 500 mm	200 N (supporting tube insulator as per 62561-8)
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	2.78 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364494497
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Specifications regarding max. gust wind speeds of the air-termination systems can be found in the wind load matrix.