
DEHNiso Spacers

DIDH 16 1030 BP V2A GFK (106123)



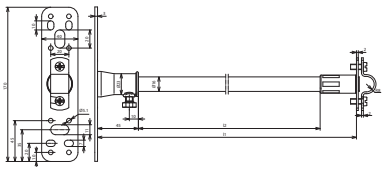

Dimension drawing

Type	DIDH 16 1030 BP V2A GFK
Part No.	**106123**
Conductor support Rd	16 mm
Material of conductor holder	StSt
Length (l1)	1030 mm
Insulating clearance (l2)	945 mm
Fixing	[8x] Ø5.1 / [4x] 7 x 10 / [2x] 11 x 20 mm
Material of plate	StSt
Application note	for insulated fixing of conductors
Diameter Ø of spacer	16 mm
Colour of spacer	light grey (RAL 7035)
Conductor routing	fixed
Rod/conductor holder	two-screw clamp
Material of spacer	**GRP**
Material factor km	0.7
Permanent temperature range	-50 °C ... +100 °C
Material of fixing bush	**ZDC**
Type	UV-stabilised and weather-resistant
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	686 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364100220
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Verisons with other spacer bar lengths are available upon request.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component