
Spacer for the HVI Conductor / HVI light plus Conductor

DH ZS 20 D16 1270 GFK PA (106815)



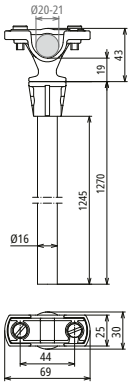

Dimension drawing

Spacer for additional mechanical fixing in the variable sealing end area. The spacer is installed with two concrete bases (part no. 102 010; weight: 17 kg). The concrete base and the plastic base plate (part no. 102 050) must be ordered separately.

Type	**DH ZS 20 D16 1270 GFK PA**
Part No.	**106815**
Material of spacer	**GRP**
Material of conductor holder / adapter	**PA**
Number of concrete bases	2 (17 kg each)
Length	1270 mm
Insulating clearance	1245 mm
Conductor support Rd	20-21 mm
Conductor routing	fixed
Thread	M8
Screw	M6 x 13 mm

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364381506
PU	1 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component