

HA M8 AL ZF B5.2 6.5 V2A (123 043)

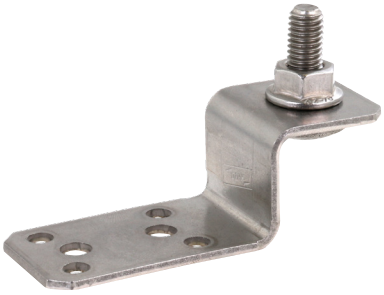

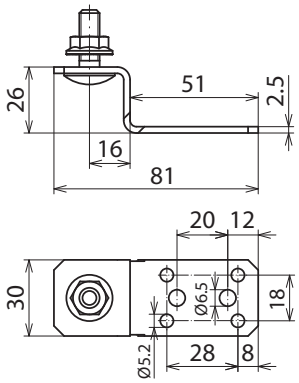

Dimension drawing

Screw lock using self-locking nut with serrated bearing.
Note: The leak-tightness of the roof must be ensured during installation; e.g. by using waterproof cup rivets. You might need to consult with the trade people responsible.

Type	**HA M8 AL ZF B5.2 6.5 V2A**
Part No.	**123 043**
Material of holder	StSt
Fixing	[4x] Ø5.2 / [2x] Ø6.5 mm
Material thickness	2.5 mm
Screw	M8 x 25 mm
Material of screw / nut	StSt
Standard	EN 62561-1

Masterdata	
Net weight	75 g/pc(s)
GTIN	4013364353824
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.