

# Roof Conductor Holders with Angled Brace for Roof Surfaces

## DLH DQ 6.10 H55 L115 WS STTZN (202050)

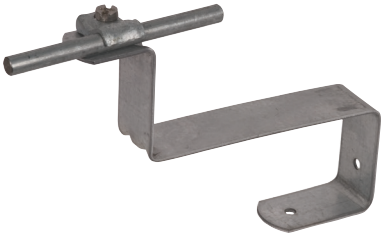

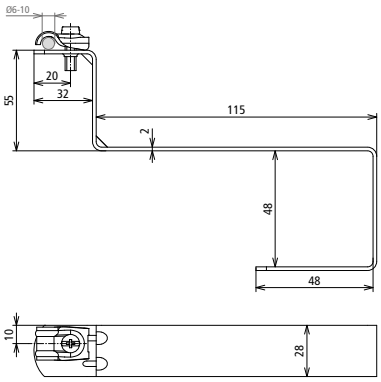


Dimension drawing

| Type | DLH DQ 6.10 H55 L115 WS STTZN |
|---|---|
| **Part No.** | **202050** |
| Material of roof conductor holder | **St/tZn** |
| Length of brace (l1) | 115 mm |
| Material of conductor holder | **St/tZn** |
| Conductor support Rd | 6-10 mm |
| Type of roofing | tiled roofs |
| Fixing possibility | for hooking at the roof battens |
| Type of conductor holder | DEHNquick |
| Conductor routing | fixed |
| Bore Ø | 8.4 mm |

| Masterdata | |
|---|---|
| Net weight | 1 pc(s)/st |
| Customs tariff number (Comb. Nomenclature EU) | 85389099 |
| GTIN | 4013364020214 |
| PU | 25 st |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component