

Roof conductor holder

DLH ZS 20 23 H55 L205 V2A (202829)

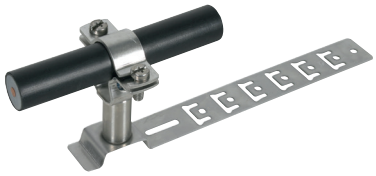

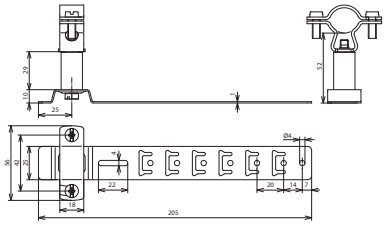

Dimension drawing

Roof conductor holder with prepunched points for bending and hooking in the roof tile and for bolting to the roof battens, for routing the HVI Conductor, HVI light plus Conductor, in gable roof surfaces.

Type	**DLH ZS 20 23 H55 L205 V2A**
Part No.	**202829**
Material of roof conductor holder	StSt
Material of conductor holder	StSt
Conductor support Rd	20-23 mm
Height of conductor holder	53 mm
Conductor routing	fixed
Length of brace	205 mm
Type of roofing	tiled
Type of brace	preformed bending points
Fixing possibility	hook locking, angling, nailing
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	119 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364159822
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component