

Roof conductor holder for roofs with standing seam

DLH SF ZS 20 23 V2A (202852)

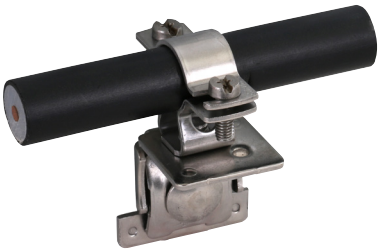

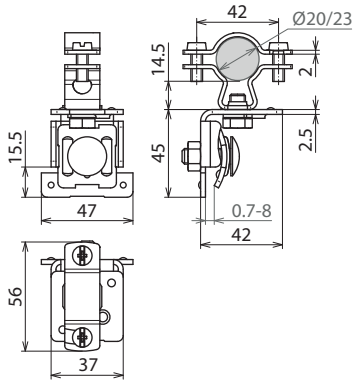

Dimension drawing

Roof conductor holder with slotted saddle clamp for HVI light Conductor, HVI light plus Conductor HVI Conductor for fixing to metal roofs with standing seam.

Type	**DLH SF ZS 20 23 V2A**
Part No.	**202852**
Material of roof conductor holder	StSt
Material of conductor holder	StSt
Material thickness	2.5 mm
Clamping range	0.7-8 mm
Conductor support Rd	20-23 mm
Conductor routing	fixed
Screw	M8 x 25, M6 x 16 mm
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	153 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364354159
PU	25 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component