
Roof conductor holder

DLH ZS 27 30 H55 L205 V2A (202857)



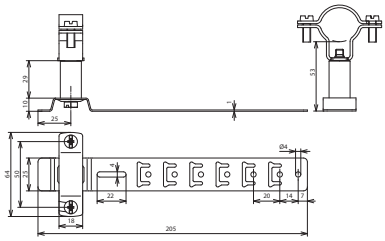

Dimension drawing

With pre-punched points for bending and hooking into the roof tile and for screwing onto battens to install the HVI power Conductor on gable roofs.

Type	DLH ZS 27 30 H55 L205 V2A
Part No.	**202857**
Material of roof conductor holder	StSt
Material of conductor holder	StSt
Conductor support Rd	27 mm
Height of conductor holder	53 mm
Conductor routing	fixed
Length of brace	205 mm
Type of roofing	pantiled roofs
Type of brace	preformed bending points
Fixing possibility	hook locking, bending, nailing
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	126.6 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364153189
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component