
# Roof conductor holder for roofs with round standing seam

## DLH RSF ZS 27 V2A (202860)



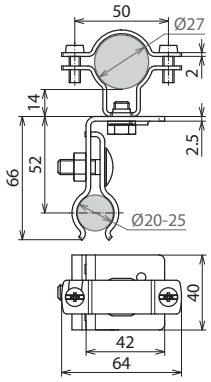


Dimension drawing

Roof conductor holder with slotted saddle clamp for fixing the HVI power Conductor onto metal roofs with round standing seam.

| **Type** | **DLH RSF ZS 27 V2A** |
|---|---|
| **Part No.** | **202860** |
| Material of roof conductor holder | StSt |
| Material of conductor holder | StSt |
| Material thickness | 2.5 mm |
| Clamping range | Ø20-25 mm |
| Conductor support Rd | 27 mm |
| Conductor routing | fixed |
| Screw | M8 x 25, M6 x 16 mm |
| Standard | DIN EN IEC 62561-8 (VDE 0185-561-8) |

| **Masterdata** | |
|---|---|
| Net weight | 207 g/pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 85389099 |
| GTIN | 4013364354180 |
| PU | 25 pc(s) |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component