
Roof Conductor Holders with Angled, Flexible Brace for Roof Surfaces

DLH FS 8 H36 L170 BR V2A (204938)



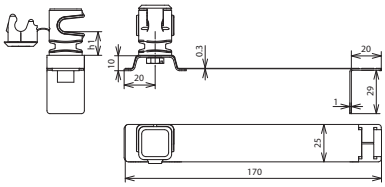

Dimension drawing

Type	DLH FS 8 H36 L170 BR V2A
Part No.	**204938**
Type of roof conductor holder	FLEXIsnap
Material of roof conductor holder	StSt
Length of brace	170 mm
Height of conductor holder (h1)	36 mm
Material of conductor holder	**plastic**
Colour of conductor holder	brown
Conductor support Rd	8 mm
Type of conductor holder	DEHNsnap
Female thread	M6
Type of roofing	interlocking tiles
Conductor routing	loose
Fixing possibility	for hooking at interlocking tiles, with flexible brace

Masterdata	
Net weight	47.2 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364029989
PU	50 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component