

# Roof Conductor Holders with Embossed Brace for Roof Surfaces

## DLH UG 8 H20 L205 V2A (206209)



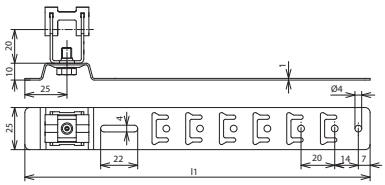


Dimension drawing

| Type | DLH UG 8 H20 L205 V2A |
|---|---|
| **Part No.** | **206209** |
| Material of roof conductor holder | StSt |
| Length of brace (l1) | 205 mm |
| Height of conductor holder | 20 mm |
| Material of conductor holder | StSt |
| Conductor support Rd | 8 mm |
| Model of conductor holder | DEHNgrip |
| Conductor routing | loose |
| Type of brace | preformed bending points |
| Fixing possibility | hook locking, angling, nailing |
| Type of roofing | pantiled roofs |
| Female thread | M6 |
| Standard | EN 62561-4 |

| Masterdata | |
|---|---|
| Net weight | 1 pc(s)/st |
| Customs tariff number (Comb. Nomenclature EU) | 85389099 |
| GTIN | 4013364042759 |
| PU | 50 st |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component