
Roof Conductor Holders with Embossed Brace for Roof Surfaces

DLH UG 8 H20 L205 KT V2A (206289)



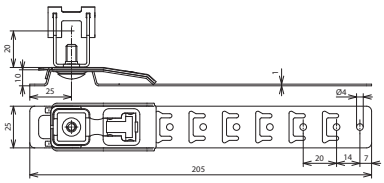

Dimension drawing

Type	DLH UG 8 H20 L205 KT V2A
Part No.	**206289**
Material of roof conductor holder	StSt
Length of brace (l1)	205 mm
Height of conductor holder	20 mm
Material of conductor holder	StSt
Conductor support Rd	8 mm
Model of conductor holder	DEHNgrip
Conductor routing	loose
Type of brace	preformed bending points
Fixing possibility	hook locking, angling, nailing, with additional clamping part
Type of roofing	roof and wall plates, slate up to max. 4mm thick
Female thread	M6
Standard	EN 62561-4

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364149427
PU	50 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component