
Roof Conductor Holders with Embossed Brace for Roof Surfaces

DLH UG 8 H32 L335 V2A (206319)



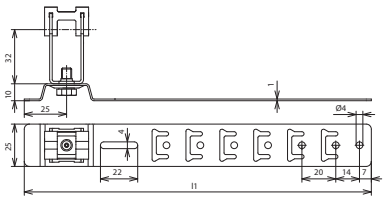

Dimension drawing

Type	DLH UG 8 H32 L335 V2A
Part No.	**206319**
Material of roof conductor holder	StSt
Length of brace (l1)	335 mm
Height of conductor holder	32 mm
Material of conductor holder	StSt
Conductor support Rd	8 mm
Model of conductor holder	DEHNgrip
Conductor routing	loose
Type of brace	preformed bending points
Fixing possibility	hook locking, angling, nailing
Type of roofing	pantiled roofs
Female thread	M6
Standard	EN 62561-4

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364042667
PU	50 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component