
DLH DG 8 H20 WPRO5 8 V2A (206 339)



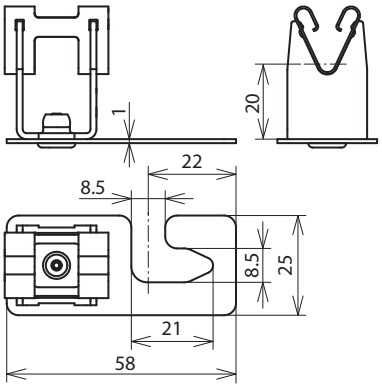

Dimension drawing

Type	DLH DG 8 H20 WPRO5 8 V2A
Part No.	**206 339**
Application note	for ridge and roof conductors, adjustable conductor leading (support)
Material of roof conductor holder	StSt
Type of conductor holder	DEHNgrip
Height of conductor holder	20 mm
Material of conductor holder	StSt
Conductor support Rd	8 mm
Conductor routing	loose
Bore Ø	7.8 mm
Fixing possibility	for clamping at the screw head
Type of roofing	corrugated sheet roofing profile 5 (distance 177 mm) profile 8 (distance 130 mm)
Standard	EN 62561-4

Masterdata	
Net weight	27 g/pc(s)
GTIN	4013364047730
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component