
DEHNiso Roof Conductor Holders

DIDLH 8 H295 D300 BS (253115)



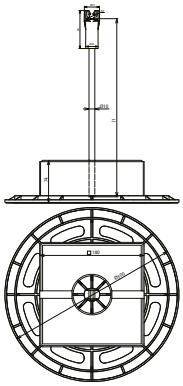

Dimension drawing

Type	DIDLH 8 H295 D300 BS
Part No.	**253115**
Conductor support Rd	8 mm
Material of roof conductor holder	**plastic / GRP**
Length (l1)	295 mm
Insulating clearance	220 mm
Diameter Ø of conductor holder lock bush	10 mm
Diameter Ø of spacer	10 mm
Colour of spacer bar	light grey (RAL 7035)
Conductor routing	loose
Material of spacer	**GRP**
Material factor km	0.7
Permanent temperature range	-30 °C ... +80 °C
Type	UV stabilised and weather resistant
Max. gust wind speed (base 4.6 kg, holder distance 1000 mm, Al Ø8 mm)	163 km/h
Standard	in line with DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	4.82 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364129870
PU	24 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component