
Roof conductor holder

DLH ZS 20 23 V2A 8.5KG KT D240 ULP (253239)

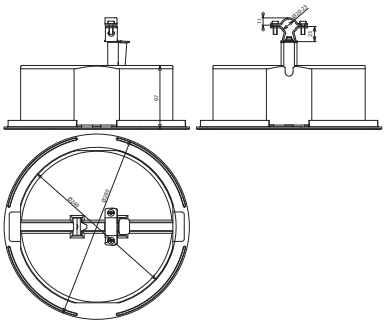

Dimension drawing

For flat roofs, weight approx. 8.6 kg
Conductor holder, concrete base and plastic base plate, for routing of the HVI light Conductor, HVI light plus Conductor, HVI Conductor on flat roofs.

Type	**DLH ZS 20 23 V2A 8.5KG KT D240 ULP**
Part No.	**253239**
Material of conductor holder	StSt
Conductor support Rd	20-23 mm
Height of conductor holder (h1)	„ mm
Material of base plate	**plastic**
Conductor routing	fixed
Block	**concrete (C45/55)**
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	8.7 kg/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364159853
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component