
Conductor holder for HVI light plus Conductor in hazardous areas

LH ZS 18 EX W55 BP V2A (275460)



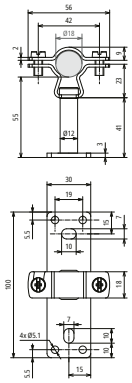

Dimension drawing

For fixing to metal structural components (e.g. façades) in Ex zones 1 and 21.

NEW

Type	LH ZS 18 EX W55 BP V2A
Part No.	**275460**
Material of base part	x
Material of saddle clamp	x
Material	StSt
Conductor support Rd	18 mm
Distance from wall	55 mm
Material of brace	x
Fixing	[4x] Ø5.1 / [2x] 7 x 10 mm
Screw	M6 x 14 mm
Screw material	StSt
Height of conductor holder	16 mm
Conductor routing	fixed
Female thread	M8
Standard	DIN EN IEC 62561-8 (VDE 0185-561-8)

Masterdata	
Net weight	138.44 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364485921
PU	10 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.