
KSV 200 13 FER V2A (300 029)



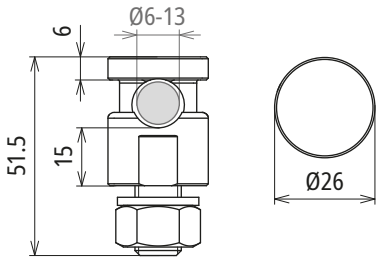

Dimension drawing

KS connector for connection of (round) conductors, e.g. to flat profiles or other parts of the lightning protection system.

Type	KSV 200 13 FER V2A
Part No.	**300 029**
Material of clamping screw	StSt
Material of clamp	StSt
Material of nut	StSt
Clamping range Rd	6-13 mm
Connection (solid / stranded)	16-108 mm²
Type	+ wedge lock washers
Screw	M12
Lightning current carrying capability (10/350 µs)	I_{imp} 200 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	4.0 kA

Masterdata	
Net weight	106.5 g/pc(s)
GTIN	4013364521001
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.