
KSVL 6.10 FER V2A (301 020)





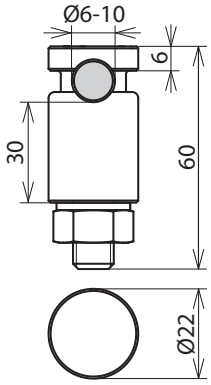

Dimension drawing

Type	KSVL 6.10 FER V2A
Part No.	**301 020**
Material of clamping screw	StSt
Material of clamp	StSt
Material of nut	StSt
Clamping range Rd	6-10 mm
Connection (solid / stranded)	25-70 mm²
Type	+ spring washer
Screw	M10
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA / I_{imp} 50 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	3.9 kA

Masterdata	
Net weight	118 g/pc(s)
GTIN	4013364481541
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component