
KSV 200 10 FER V2A (301 209)



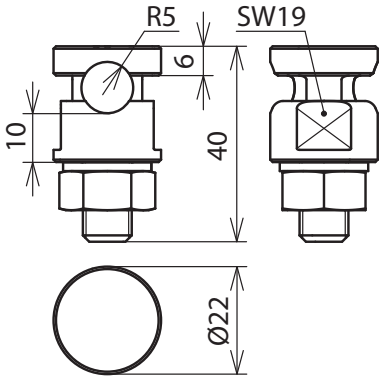

Dimension drawing

Clamping screw connector with spring washer and flatted side for connecting round conductors with flat profiles. Tested for lightning current carrying capability up to 200 kA (10/350 µs).

Type	KSV 200 10 FER V2A
Part No.	**301 209**
Material	StSt
Clamping range Rd	10 mm
Screw	M10 mm
Material of nut	StSt
Lightning current carrying capability (10/350 µs)	I_{imp} 200 kA *)
Standard	based on EN 62561-1

Masterdata	
Net weight	59 g/pc(s)
GTIN	4013364158252
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.