

PV 7.10 FRM10X35 V4A (306 029)

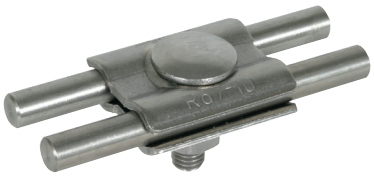

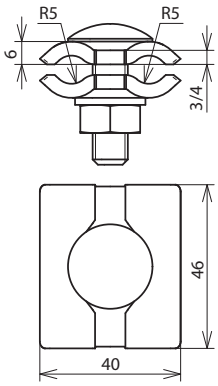

Dimension drawing

Type	PV 7.10 FRM10X35 V4A
Part No.	**306 029**
Material of clamp	StSt (V4A)
Material No. clamp	1.4571 / 1.4404 / 1.4401
ASTM / AISI clamp	316Ti / 316L / 316
Clamping range Rd / Rd	7-10 mm
Clamping range (stranded / cable)	25-120 mm²
Screw	M10 x 35 mm
Material of screw / nut	StSt (V4A)
Material No. bolt / nut	1.4571 / 1.4404 / 1.4401
ASTM / AISI bolt / nut	316Ti / 316L / 316
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA *)
Standard	EN 62561-1
Type	also for underground application
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	2.9 kA
Material thickness	3 mm

Masterdata	
Net weight	120 g/pc(s)
GTIN	4013364129467
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEW: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component