

PV 5.16 SKM10X50 CU (306 101)

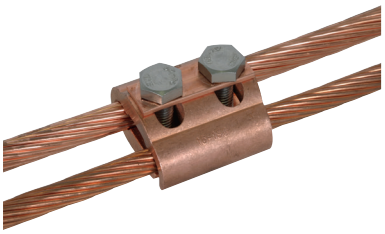

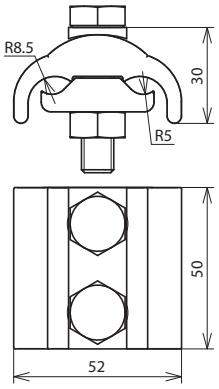

Dimension drawing

With thread in the base part and lock nut M10
Specified short-circuit current applies to 95 mm² Cu cable

Type	PV 5.16 SKM10X50 CU
Part No.	**306 101**
Material of clamp	Cu
Clamping range Rd / Rd	5-16 mm
Clamping range (stranded / cable)	16-150 mm²
Screw	M10 x 50 mm
Material of screw / nut	StSt (V4A)
Material No. bolt / nut	1.4571 / 1.4404 / 1.4401
ASTM / AISI bolt / nut	316Ti / 316L / 316
Lightning current carrying capability (10/350 µs)	100 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	18.5 kA

Masterdata	
Net weight	412 g/pc(s)
GTIN	4013364024120
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.