
Connecting Clamps for Foundation Earth Electrodes and Reinforcements

VK 6.20 FL30 BSB STBL (308032)



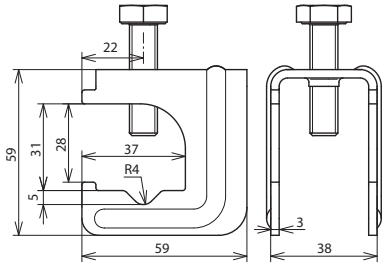

Dimension drawing

Type	VK 6.20 FL30 BSB STBL
Part No.	**308032**
Material	**St/bare**
Clamping range Rd / Fl	(+) 6-20 / 30 x 3-4 mm
Clamping range Fl / Fl	(+/II) 30 x 3-4 / 30 x 3-4 mm
Screw	M10 x 40 mm
Screw material	**St/bare**
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	7.0 kA
Lightning current carrying capability (10/350 µs)	100 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364152823
PU	25 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.