

Connecting Clamps for Foundation Earth Electrodes and Reinforcements

VK DB KR 6.20 8.10 FL30 BSB STBL (308033)

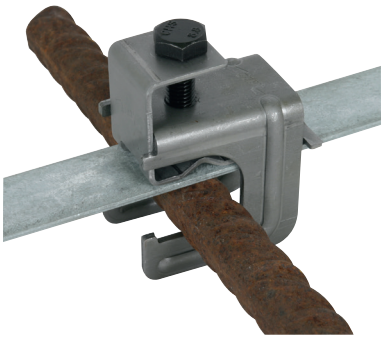

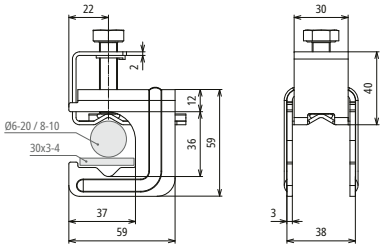

Dimension drawing

Type	**VK DB KR 6.20 8.10 FL30 BSB STBL**
Part No.	**308033**
Material	**St/bare**
Clamping range Rd / Rd	(+/II) 6-20 / 8-10 mm
Clamping range Rd / Fl	(+/II) 6-20 / 30 x 3-4 mm
Clamping range Fl / Fl	(+/II) 30 x 3-4 / 30 x 3-4 mm
Screw	M10 x 35 mm
Screw material	**St/bare**
Type	With clamping ring
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	8.4 kA
Lightning current carrying capability (10/350 µs)	I_{imp} 50 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364519978
PU	25 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.