

BVK 16.48 FL40 KB6.10 BSB STBL (308 046)

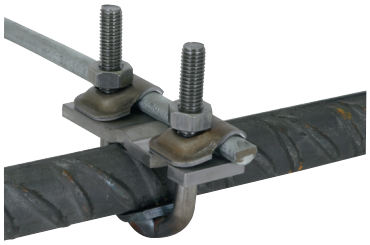

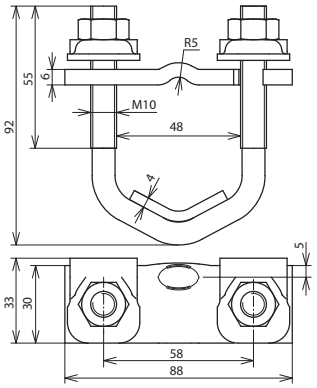

Dimension drawing

Type	BVK 16.48 FL40 KB6.10 BSB STBL
Part No.	**308 046**
Material	**St/bare**
Clamping range Rd / Rd	(+/II) 16-48 / 6-10 mm
Clamping range Rd / Fl	(II) 16-48 / 30-40 mm
Screw	U-bolt M10 x 48 mm
Screw material	**St/bare**
Lightning current carrying capability (10/350 µs)	I_{imp} 50 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	9.9 kA

Masterdata	
Net weight	287.6 g/pc(s)
GTIN	4013364124462
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component