
DC BK 6 RD6 STBLANK (308 134)



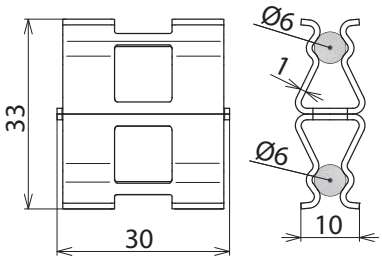

Dimension drawing

- Compact, light and resource-saving
- Quick and without tools
- Efficient and time-saving

Type	DC BK 6 RD6 STBLANK
Part No.	**308 134**
Material	**St/bare**
Clamping range Rd* / Rd*	6-7 / 6-7 mm
Material thickness (t1)	1 mm
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	2.2 kA
Lightning current carrying capability (10/350 µs)	limp 50 kA **
Standard	EN 62561-1

Masterdata	
Net weight	17.52 g/pc(s)
GTIN	4013364308091
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) Nominal diameter d_s of the reinforcement
**) For exact assignment see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component