
DC BK 8 RD8 STBLANK (308 135)



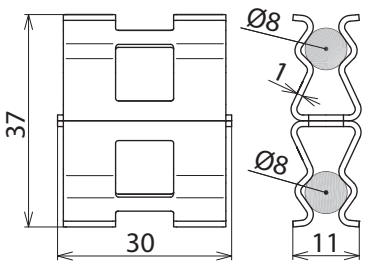

Dimension drawing

- Compact, light and resource-saving
- Quick and without tools
- Efficient and time-saving

Type	DC BK 8 RD8 STBLANK
Part No.	**308 135**
Material	**St/bare**
Clamping range Rd* / Rd*	8-9 / 8-9 mm
Material thickness (t1)	1 mm
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	2.4 kA
Lightning current carrying capability (10/350 µs)	I_{imp} 50 kA **
Standard	EN 62561-1

Masterdata	
Net weight	17.52 g/pc(s)
GTIN	4013364308107
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) Nominal diameter d_s of the reinforcement
**) For exact assignment see test certificate.