

DC BK 8 FL30 STBLANK (308 141)

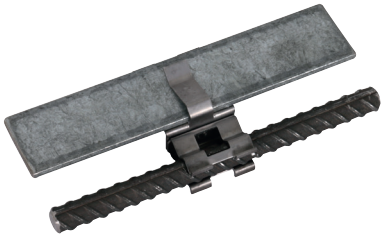

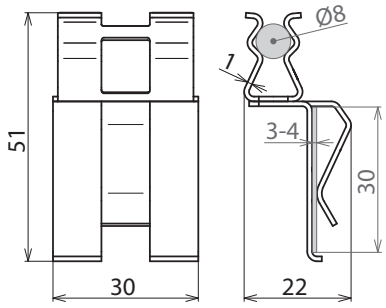

Dimension drawing

- Compact, light and resource-saving
- Quick and without tools
- Efficient and time-saving

Type	DC BK 8 FL30 STBLANK
Part No.	**308 141**
Material	**St/bare**
Clamping range Rd* / Fl	8-9 / 30 mm
Material thickness (t1)	1 mm
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	2.3 kA
Lightning current carrying capability (10/350 µs)	I_{imp} 50 kA **
Standard	EN 62561-1

Masterdata	
Net weight	19.22 g/pc(s)
GTIN	4013364288904
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) Nominal diameter d_s of the reinforcement
**) For exact assignment see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component