

# DC BK 10 FL30 STBLANK (308 142)

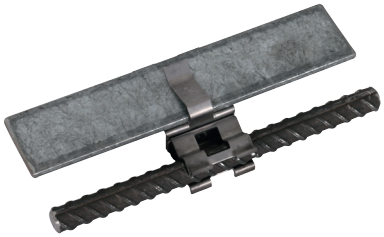

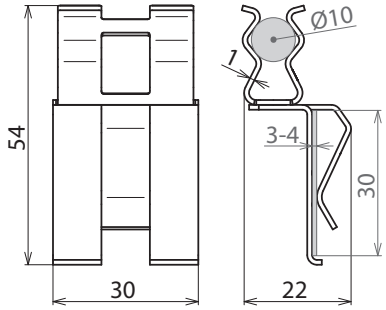


Dimension drawing

- Compact, light and resource-saving
- Quick and without tools
- Efficient and time-saving

| Type | DC BK 10 FL30 STBLANK |
|---|---|
| **Part No.** | **308 142** |
| Material | **St/bare** |
| Clamping range Rd* / Fl | 10 / 30 mm |
| Material thickness (t1) | 1 mm |
| Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C) | 2.3 kA |
| Lightning current carrying capability (10/350 µs) | $I_{imp}$ 50 kA ** |
| Standard | EN 62561-1 |

| Masterdata | |
|---|---|
| Net weight | 18.26 g/pc(s) |
| GTIN | 4013364288522 |
| PU | 1 pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) Nominal diameter $d_s$ of the reinforcement
**) For exact assignment see test certificate.