
SV Clamps for Aboveground and Underground Connections

SVK 7.10 7.10 FL40 STTZN (308320)



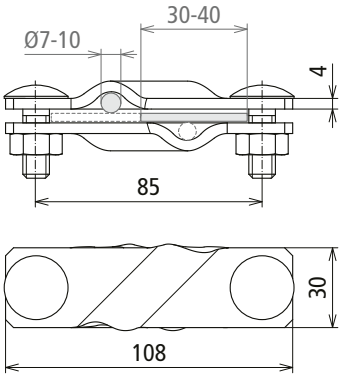

Dimension drawing

Type	SVK 7.10 7.10 FL40 STTZN
Part No.	**308320**
Material of clamp	**St/tZn**
Clamping range Rd / Rd	7-10 / 7-10 mm
Clamping range Rd / Fl	7-10 / 30-40 mm
Clamping range Fl / Fl	30-40 / 30-40 mm
Clamping range (stranded / cable)	35-120 mm²
Screw	M10 x 30 mm
Material of screw / nut	**HDG steel**
Dimensions (l1 x d1)	108 x 4 mm
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA / I_{imp} 50 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	14.0 kA

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364028531
PU	25 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.