
SAK 21 AS V4A (308 406)

- System for anchor bars which is capable of carrying lightning currents
- Large-area shield support
- Compensates the yield of cable materials



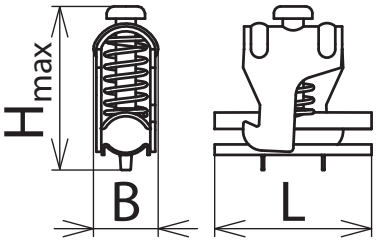

Dimension drawing

Shield terminals for earthing cable shields on anchor bars. Suitable for lightning equipotential bonding. Can be subsequently installed without interrupting the cable shield or requiring tools for installation.

Type	**SAK 21 AS V4A**
Part No.	**308 406**
Lightning impulse current carrying capability (10/350 µs)	10 kA
Clamping range Rd	17-21 mm
Material	StSt
Spring pressure	30-63 N
For mounting on	anchor bars
Dimensions (B x L x H)	29 x 40 x 59 mm

Masterdata	
Net weight	29.24 g/pc(s)
GTIN	4013364070530
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component