
# Cross Units for Aboveground and Underground Connections

## KS FL30 STTZN (318033)





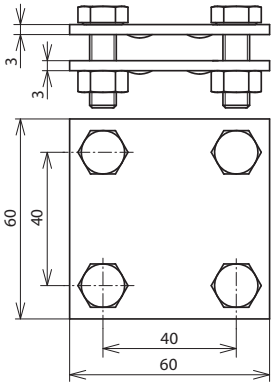


Dimension drawing

| Type | KS FL30 STTZN |
|---|---|
| **Part No.** | **318033** |
| Material of clamp | **St/tZn** |
| Clamping range Fl / Fl | 30 / 30 mm |
| Screw | M8 x 25 mm |
| Material of screw / nut | **St/tZn** |
| Dimensions | 60 x 60 x 3 mm |
| Lightning current carrying capability (10/350 µs) | 100 kA *) |
| Standard | EN 62561-1 |
| Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C) | 8.4 kA |
| Zinc coating acc. EN 1461 | ~50 µm |

| Masterdata | |
|---|---|
| Net weight | 1 pc(s)/st |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |
| GTIN | 4013364021471 |
| PU | 25 st |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.