

Cross Units with Truss Head Screws for Aboveground and Underground Connections

KS 8.10 8.10 FL30 ZP FRSM8 STTZN (318203)

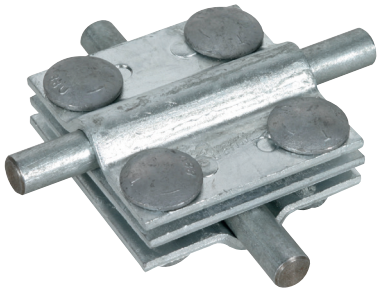

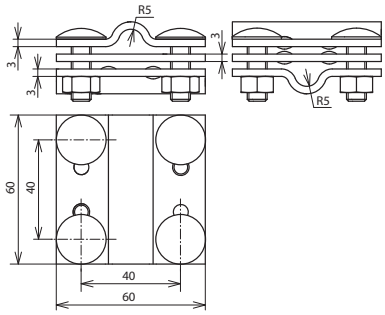

Dimension drawing

Type	KS 8.10 8.10 FL30 ZP FRSM8 STTZN
Part No.	**318203**
Material of clamp	**St/tZn**
Clamping range Rd / Rd	8-10 / 8-10 mm
Clamping range Rd / Fl	8-10 / 30 mm
Clamping range Fl / Fl	30 / 30 mm
Screw	M8 x 25 mm
Material of screw / nut	**St/tZn**
Dimensions	60 x 60 x 3 mm
Intermediate plate	yes
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	14 kA
Zinc coating acc. EN 1461	~50 µm

Masterdata	
Net weight	329 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364159914
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.