

Cross Units for Aboveground and Underground Connections

KS 8.10 FL30 V4A (318209)

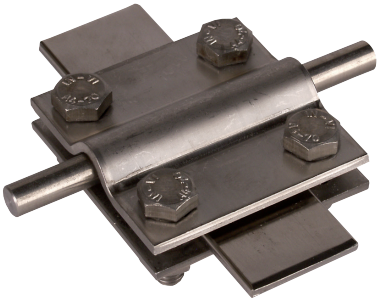

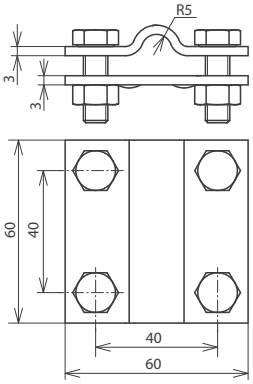

Dimension drawing

Type	KS 8.10 FL30 V4A
Part No.	**318209**
Material of clamp	StSt (V4A)
Material No. clamp	1.4571 / 1.4404 / 1.4401
ASTM / AISI clamp	316Ti / 316L / 316
Clamping range Rd / Fl	8-10 / 30 mm
Clamping range Fl / Fl	30 / 30 mm
Clamping range (stranded / cable)	35-120 mm²
Screw	M8 x 25 mm
Material of screw / nut	StSt (V4A)
Material No. bolt / nut	1.4571 / 1.4404 / 1.4401
ASTM / AISI bolt / nut	316Ti / 316L / 316
Dimensions	60 x 60 x 3 mm
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	7.4 kA

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364035973
PU	25 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component