
Cross Units with Truss Head Screws for Aboveground and Underground Connections

KS 8.10 8.10 FL30 ZP FRSM8 V4A (318229)



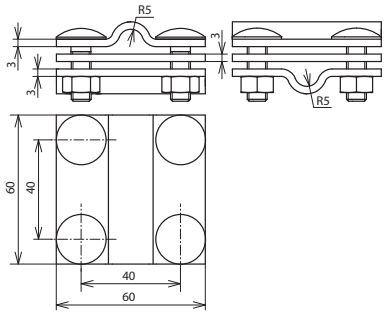

Dimension drawing

Type	KS 8.10 8.10 FL30 ZP FRSM8 V4A
Part No.	**318229**
Material of clamp	StSt (V4A)
Material No. clamp	1.4571 / 1.4404 / 1.4401
ASTM / AISI clamp	316Ti / 316L / 316
Clamping range Rd / Rd	8-10 / 8-10 mm
Clamping range Rd / Fl	8-10 / 30 mm
Clamping range Fl / Fl	30 / 30 mm
Clamping range (stranded / cable)	35-70 mm²
Screw	M8 x 25 mm
Material of screw / nut	StSt (V4A)
Material No. bolt / nut	1.4571 / 1.4404 / 1.4401
ASTM / AISI bolt / nut	316Ti / 316L / 316
Dimensions	60 x 60 x 3 mm
Intermediate plate	yes
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	7 kA
Zinc coating acc. EN 1461	µm

Masterdata	
Net weight	323 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364159938
PU	25 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.