

KS 7.10 B10.5 AL (347 205)

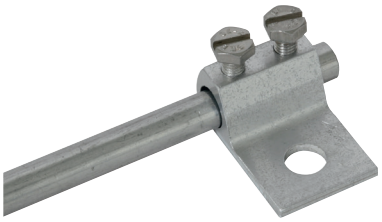

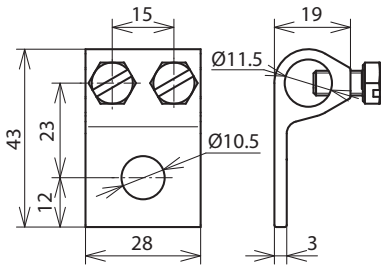

Dimension drawing

Type	KS 7.10 B10.5 AL
Part No.	**347 205**
Clamping range Rd	7-10 mm
Material	Al
Fixing hole Ø	10.5 mm
Screw	M6 x 12 mm
Screw material	StSt
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	24.9 g/pc(s)
GTIN	4013364136601
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component