
FK MV 8.10 KBF0.7 10 V2A (365 229)



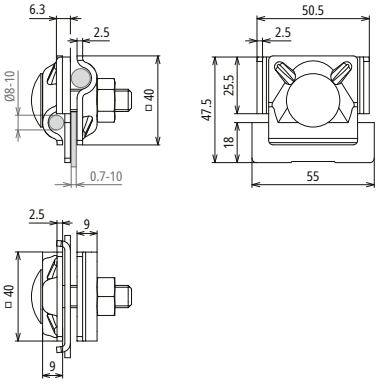

Dimension drawing

Type	FK MV 8.10 KBF0.7 10 V2A
Part No.	**365 229**
Clamping range of saddle	0.7-10 mm
Material of clamp	StSt
Clamping range Rd	8-10 mm
Screw	M10 x 45 mm
Material of screw / nut	StSt
Material thickness	2.5 / 2.5 mm
Type of connection	Releasable connection
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	160.8 g/pc(s)
GTIN	4013364096110
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component