
AK 6.10 KSV S KBF18 35 V2A (372 159)



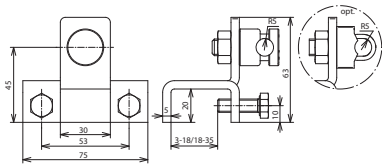

Dimension drawing

Type	AK 6.10 KSV S KBF18 35 V2A
Part No.	**372 159**
Clamping range	18-35 mm
Material of clamp	StSt
Clamping range Rd	6-10 mm
Screw	M8 x 25 mm
Material of screw / nut	StSt
Connection with	clamping piece
Lightning current carrying capability (10/350 µs)	50 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	333.2 g/pc(s)
GTIN	4013364119215
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component