

Connection clamps for steel girders for hazardous areas zone 2/22

AK 6.10 KSV FER S KBF18 35 V2A (372179)

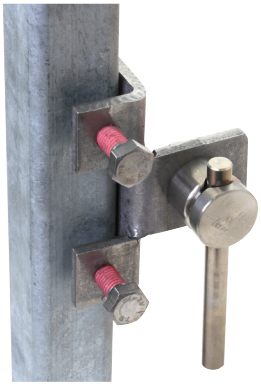

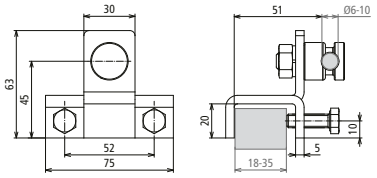

Dimension drawing

Heavy design; for connection to steel structures.
All connections secured against self-loosening:
– Connection to the steel structure using adhesive-coated screws
– Round conductor connection using spring washer
Suitable for use in hazardous area zone 2/22.

Type	AK 6.10 KSV FER S KBF18 35 V2A
Part No.	**372179**
Clamping range	18-35 mm
Material of clamp	StSt
Clamping range Rd	6-10 mm
Screw	M8 x 25 mm
Material of screw / nut	StSt
Type	with spring washer
Lightning current carrying capability (10/350 µs)	I_{imp} 50 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364463684
PU	10 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.