
AKK DUL 8.10 KBF 36 52 STTZN (372 320)



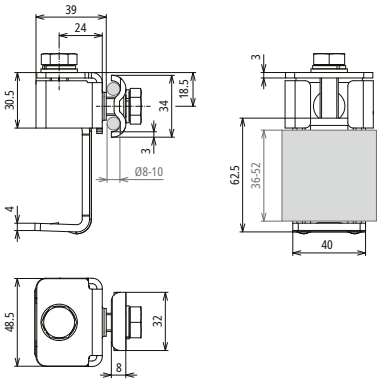

Dimension drawing

- Penetration of surface coatings up to 0.2 mm with blade or blade and screw.
- Suitable for use in Ex zone 2/22. All connections secured against self-loosening.

Type	AKK DUL 8.10 KBF 36 52 STTZN
Part No.	**372 320**
Clamping range	36-52 mm
Material of clamp	**St/tZn**
Clamping range Rd	8-10 mm
Screw	M10 x 32 mm / M10 x 18 mm
Screw / spring washer material	StSt
Type of connection	Releasable connection
Penetration of surface protection	Up to 0.2 mm with blade or blade and screw
Connection with	Double clamp
Lightning current carrying capability (10/350 µs)	I_{imp} 50 kA I_{imp} 100 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	321.44 g/pc(s)
GTIN	4013364520387
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEW: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component