
AKK DUL 8.10 KBF 36 52 V2A (372 329)



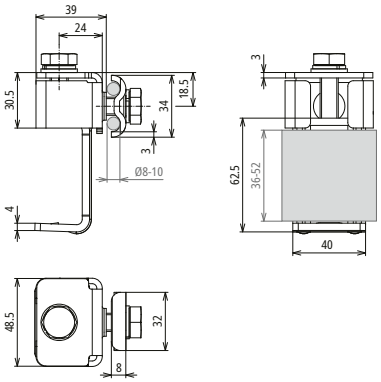

Dimension drawing

- Penetration of surface coatings up to 0.2 mm with blade or blade and screw.
- Suitable for use in Ex zone 2/22. All connections secured against self-loosening.

Type	AKK DUL 8.10 KBF 36 52 V2A
Part No.	**372 329**
Clamping range	36-52 mm
Material of clamp	StSt
Clamping range Rd	8-10 mm
Screw	M10 x 32 mm / M10 x 18 mm
Screw / spring washer material	StSt
Type of connection	Releasable connection
Penetration of surface protection	Up to 0.2 mm with blade or blade and screw
Connection with	Double clamp
Lightning current carrying capability (10/350 µs)	I_{imp} 50 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	308.22 g/pc(s)
GTIN	4013364520394
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.