
AKK AL B11.11 KBF 3 20 STTZN (372 330)



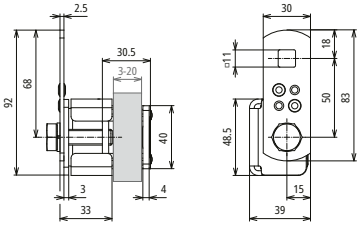

Dimension drawing

- Penetration of surface coatings up to 0.2 mm with blade or blade and screw.
- Suitable for use in Ex zone 2/22. All connections secured against self-loosening.

Type	AKK AL B11.11 KBF 3 20 STTZN
Part No.	**372 330**
Clamping range	3-20 mm
Material of clamp	**St/tZn**
Screw	M10 x 35 mm
Screw / spring washer material	**StSt**
Type of connection	Releasable connection
Penetration of surface protection	Up to 0.2 mm with blade or blade and screw
Connection with	Connection bracket
Connection bracket square hole	11x11 mm
Lightning current carrying capability (10/350 µs)	I_{imp} 50 kA I_{imp} 100 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	278.21 g/pc(s)
GTIN	4013364515758
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEW: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component